


Image not found or type unknown



Technical information

Productnumber : 77-A121113

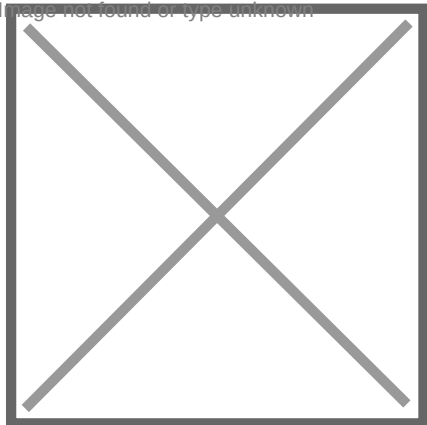

Product description

Rolling scaffold MI Tower for rental, demolition or maintenance companies, painters, installers, electricians and freelancers

- Max. load per level (Pressure) (kg/m²) 150 kg/m²
- Working height (m) 5.20 m
- Platform height (m) 3.20 m
- Platform length (m) 1.27 m
- Platform width (m) 0.8 m
- Material ALUMINUM
- Floor area length (m) 2.93 m
- Floor area width (m) 2.49 m
- Max. load (kg) 150 kg
- Weight (kg) 101 kg
- Wheel Ø (mm) 125 mm
- EN Standard EN 1004
- Folded width (m) 0.6 m
- Folded length (m) 1.27 m
- Folded height (m) 1.60 m
- Step width (mm) 800 mm

Specifications

Article arrangement: New
Version: quick build
Subgroup: Mobile scaffolding
Width (mm): 2940
Depth (mm): 2930
Weight (kg) 101
Type number: C003002
Horizontal platform (mm): 3200

Type: Altrex mobile scaffolding
Material: aluminium
Colour: alu silver
Height (mm): 4000
Loading capacity (kg): 150
Options: Norm: EN1004
Additional specifications: type use: professional
Work height (mm): 5200



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment



Technical information
Productnumber : 77-A121113



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment