


Image not found or type unknown

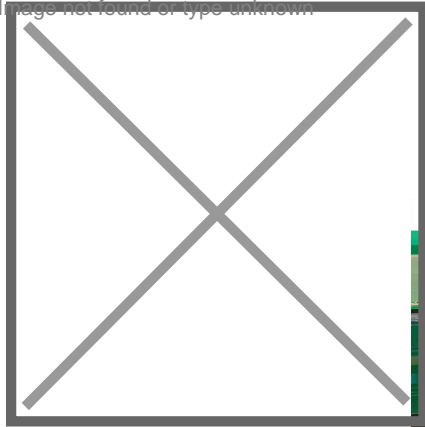

## Technical information

**Productnumber : 8615011023**

### Product description

High quality ramp suitable for loading medium to heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per ramp is 25 kg. The load capacity shown is per set!

This ramp is supplied as standard with connection A and a flat floor 1 , see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

### Specifications

Article arrangement: New  
Version: aluminium 125 cm (pair)  
Top: driving area of anti slip profile  
Width (mm): 500  
Loading capacity (kg): 7300  
Type number: AVS-150  
Max Height (mm): 220

Type: access ramp straight  
Material: aluminium  
Length (mm): 1250  
Internal width (mm): 400  
Weight (kg) 25  
Batch (items): 2  
EAN Code (Gtin) 8719424103960

Scan the QR code for more information



**KRUIZINGA.NL®**  
Opslag- en transportmiddelen

**KRUIZINGA.DE®**  
Lager- und Transportmittel

**KRUIZINGA.FR®**  
Stockage et ressources de transport

**KRUIZINGA.COM®**  
Material handling equipment