

Image not found or type unknown



Technical information

Productnumber : 75.326.884.753Z



Product description

Light duty swivel casters with brake made of pressed sheet steel, plate fitting, gray non-stretching thermoplastic rubber tire, precision ball bearing, Wheel-Ø 75mm, 75KG

Wheel: gray non-stretching thermoplastic rubber tire, with wheel core made of polypropylene, precision ball bearing,

Advantages: Versatile use for light transport in e.g. offices, warehouses, stores and institutions. Low-noise, impact resistant and vibration damping. Swivel castor for light applications. Less suitable for long-term, static use under maximum load.

Applications: Nightstands, computer tables, display stands, trash cans, file cabinets, clothing racks, greeting card dispensers, cleaning carts, IV stands, newspaper dispensers, sales stands, small furniture, sports equipment.

Suitable surfaces: Flat or with minor unevenness. Non-stripping tape for use on ceramic tiles, linoleum, etc.

Suitable environment: Dry and not permanently damp. With light acids and bases.

Specifications

Article arrangement: New

Version: Ø 75x25 mm

Top: base plate 60x60 mm

Bolt hole: Ø 6.1 mm

Surface treatment: galvanized

Width (mm): 25

Loading capacity (kg): 75

Type number: 326884753Z

Temperature resistance: 0 / +40°C

Type: castor wheel with brake

Material: thermo rubber

Hole centres: 42x42 mm

Colour: colorless

Length (mm): 75

Height (mm): 100

Wheel bearing: ball bearing

Wheels diameter: 75

EAN Code (Gtin) 8719424235562

Scan the QR code for more information




KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment

Image not found or type unknown

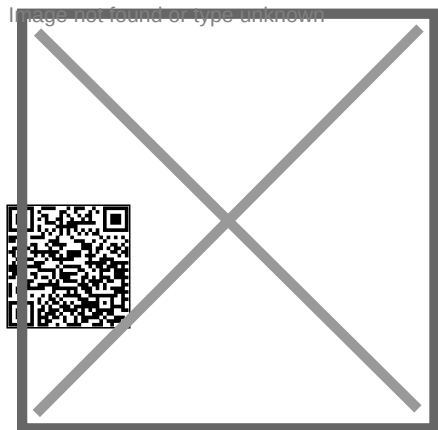

Technical information

Productnumber : 75.326.884.753Z



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment