


Image not found or type unknown.



## Technical information

**Productnumber : 75.178.436.153**

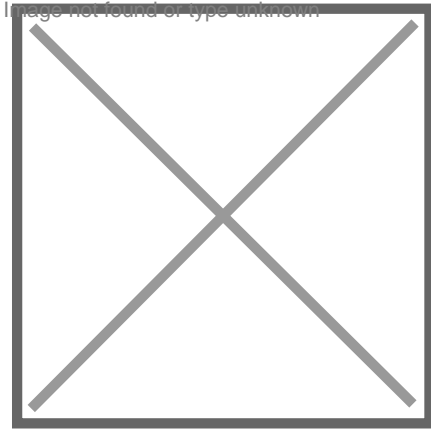

### Product description

for more information see manual.

Advantages: For heavy transport on flat floors and for long-term static use under load. Very low rolling resistance. Relatively insensitive to damage and wear.

Applications: Heavy material handling, heavy containers, automotive plants, petrochemical plants, heavy transport, ports, armed forces, aviation, bridge cranes, chemical companies.

Suitable surface: Hard and flat such as tiles, cement and coatings.

Suitable environment: Dry and not permanently damp. With weak chemicals.

### Specifications

Article arrangement: New

Version: Ø 150 mm

Top: base plate 135x110 mm

Bolt hole: Ø 12.5 mm

Surface treatment: galvanized

Width (mm): 110

Loading capacity (kg): 500

Wheel bearing: ball bearing

EAN Code (Gtin) 8719424014051

Type: castor wheel with brake

Material: polyurethane rolling surface

Hole centres: 105x80 mm

Colour: colorless

Length (mm): 140

Height (mm): 205

Weight (kg) 5

Type number: 757843

Scan the QR code for more information



**KRUIZINGA.NL®**  
Opslag- en transportmiddelen

**KRUIZINGA.DE®**  
Lager- und Transportmittel

**KRUIZINGA.FR®**  
Stockage et ressources de transport

**KRUIZINGA.COM®**  
Material handling equipment